


Add Video. **Online!**
Your web page comes alive!

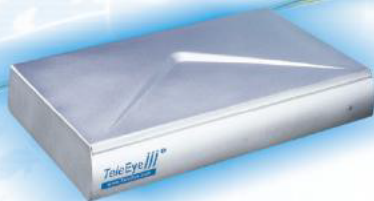

CyberTeleEye WebVideo Solution is a flexible development tool to create, build and manage live video on users' existing web pages. Users can use its **Video Page Generator** to add **video icon**  onto their current web pages. Just click . Video will come on your screen in either pop-up or on-screen window styles. It works well with other popular web development tools to create web video applications.

To facilitate management and security control, the **Video Page Generator** helps to build up video user account systems. Web administrator can assign different authorization levels to different persons and manage their access to locations or cameras.

CyberTeleEye Video Server can tremendously increase the number of concurrent users. It receives videos from up to 4 **TeleEye** video transmitters and distributes them to numerous Internet users at the same time. Its scalable architecture allows flexible capacity expansion by cascading a number of video servers.

Applications:

- Property Management
- Traffic Monitoring
- Intelligent Home/Facilities Management
- Live Events Broadcasting
- Tourist Attraction
- Business Promotion

TeleEye


www.TeleEye.com

To add live video onto your web page, you require...

- **TeleEyeIII+ Video Transmitter or TeleEyeIII+ Video Recording Transmitter**
- **Video Page Generator (CY-G100)**
- **Video Server (CY-S450)**

The Video Page Generator allows users to create live video web page and manipulate cameras.

The Video Server receives compressed video from the video transmitter and distributes video to users.

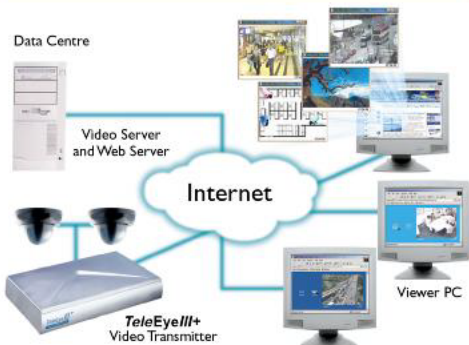

Features:

Video Page Generator (CY-G100)

- Compatible with existing login system
- Video display in popup/on-screen mode
- Compatible with popular web development tools
- Different access levels to cameras/locations
- Video page supports different functions:
 - Telemetry control
 - Alarm notification
 - Live and playback video
 - Adjustable image quality and resolution

Video Server (CY-S450)

- Connection up to 4 TeleEye transmitters
- Scalable architecture
- Access restriction and duration control
- Audit trail
- Multi-rate transmission
- Server performance monitoring

System Requirements:

CPU	: Pentium III 866MHz or better
RAM	: 256MB or better
Network	: 100 BaseT
HDD	: 20MB or better
OS	: MSWindows NT,2000,XP



TeleEye Group

Hong Kong (Head Office)

Signal Communications Limited

Units 216-7, Tech Centre, 72 Tat Chee Avenue, Kowloon, Hong Kong
Tel: (852) 2319 2151 Fax: (852) 2319 2550 Email: info@TeleEye.com

China

Tel: (86) 135 306 237 78 Email: info@TeleEye.com.cn

Japan

Tel: (81) 42 742 2690 Fax: (81) 42 742 2616

Singapore

Tel: (65) 6745 3921 Fax: (65) 6742 1965

U.K.

Tel: (44) 118 953 3707 Fax: (44) 118 953 3708

Email: info@CAMERIO.co.jp

Email: sales@TeleEye.com.sg

Email: ukinfo@TeleEye.com